


OCHIAI标准E型挡圈（轴用）

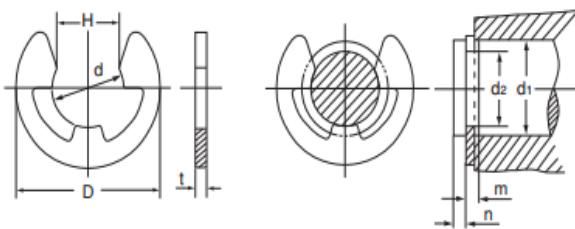

型号	挡圈尺寸								适用轴						
	d		D		H		t		d1		d2		m	n	
	基本尺寸	公差	基本尺寸	公差	基本尺寸	公差	基本尺寸	公差	以上	以下	基本尺寸	公差	基本尺寸	公差	最小
ETW-0.6	0.6	±0.02	1.5		0.45	±0.02	0.2		0.8	1	0.65		0.3		0.4
ETW-0.7	0.67	0 -0.08	2		0.55	0 -0.1	0.2	±0.02	0.9	1.2	0.7	+0.05 -0	0.3		0.4
ETW-0.8	0.8		2	±0.1	0.7		0.2		1	1.4	0.82		0.3		0.4
ETW-1	0.98		2.8		0.88		0.2		1.3	1.7	1		0.3		0.5
ETW-1.2	1.2		3	0 -0.09	1		0.3	±0.025	1.4	2	1.23		0.4	+0.05 0	0.6
ETW-1.5	1.5	4	1.3			0.4	2		2.5	1.53		0.5	0.8		
ETW-1.9	1.9	4.5	1.7			0.4	2.5		3	1.93		0.5	1		
ETW-2	2	5	1.7			0.4	2.5		3.2	2.05	+0.06 -0	0.5	1		
ETW-2.3	2.3	6	2			0.4	3		4	2.35		0.5	1		
ETW-2.5	2.5	6	2.1			0.4	3.2		4	2.55		0.5	1		
ETW-3	3	7	2.6			0.6	4		5	3.05		0.7	+0.1 0	1	
ETW-3.2	3.2	7	±0.2	2.8		0.6	4		5	3.25		0.7		1.2	
ETW-4	4	9		3.5	0	0.6	5		7	4.05	+0.075 -0	0.7		1.2	
ETW-5	5	11		4.3	-0.3	0.6	6		8	5.05		0.7		1.2	
ETW-6	6	12		5.2		0.8	7		9	6.05		0.9		1.2	
ETW-7	7	14		6.1		0.8	±0.04	8	11	7.1		0.9	+0.14 0	1.5	
ETW-8	8	16		6.9	0	0.8		9	12	8.1	+0.09 0	0.9		1.8	
ETW-9	9	18		7.8	-0.35	0.8		10	14	9.1		0.9		2	
ETW-10	10	20		8.7		1		11	15	10.15		1.15		2	
ETW-12	12	0 -0.18	23	±0.3	10.4	0	1	±0.05	13	18	12.15	+0.11 0	1.15	+0.14 0	2.5
ETW-15	15		29		13	-0.45	1.5		16	24	15.15		1.65		3
ETW-19	19		37		16.5		1.5		20	31	19.15	+0.13 0	1.65		3.5
ETW-24	24	0 -0.21	44		20.8	0 -0.5	2		25	38	24.15		2.2		4